


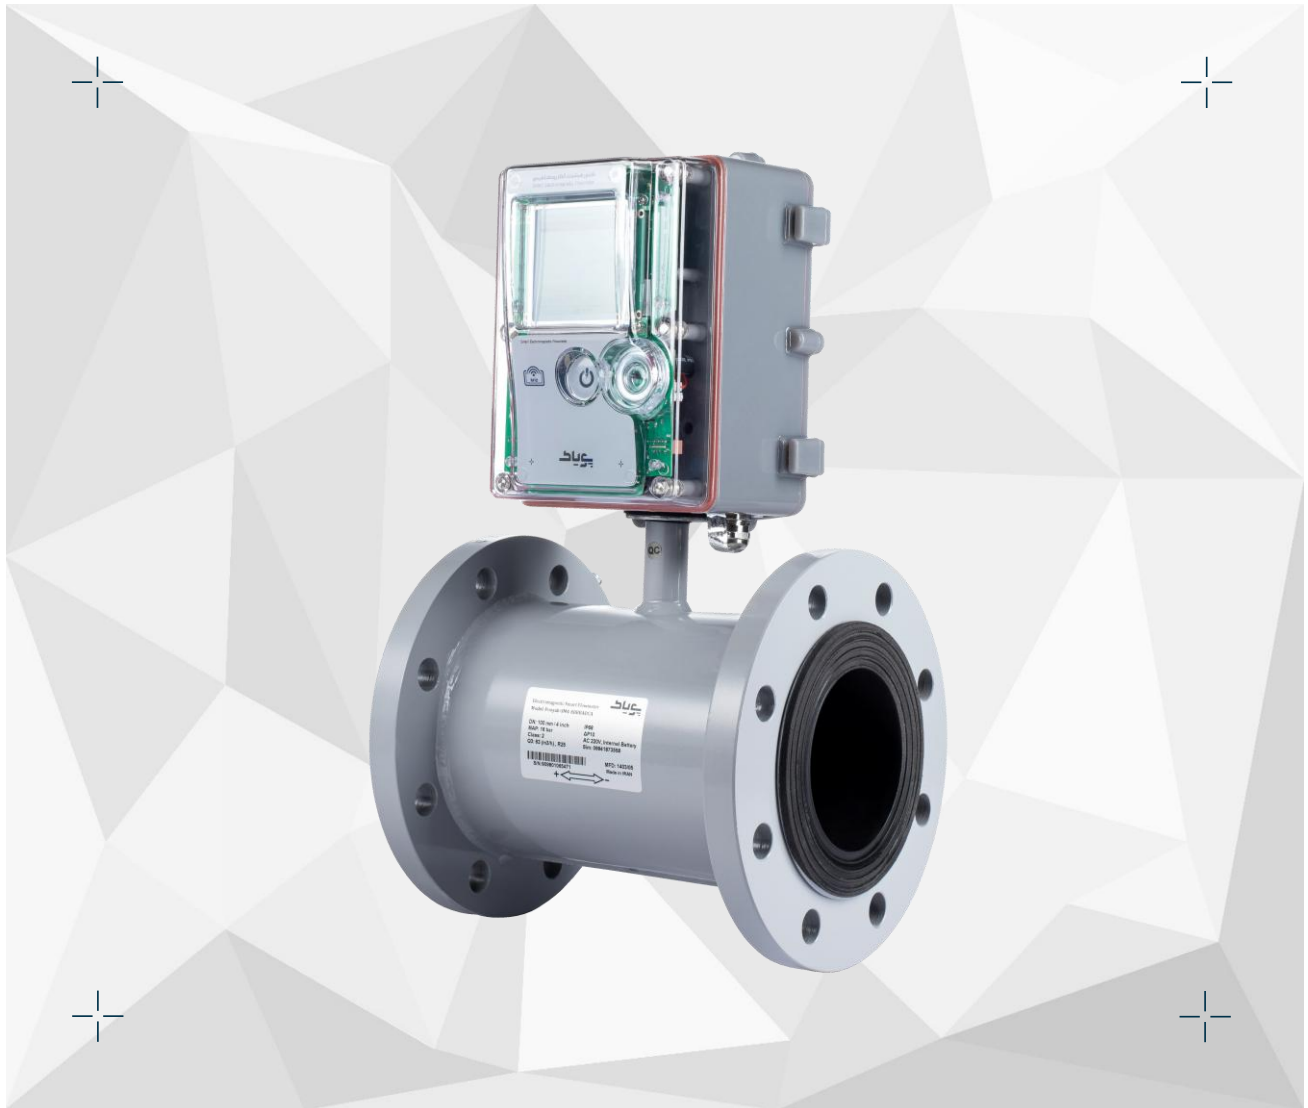

P00YAB-SM6 Technical Datasheet

Smart Electromagnetic Flow Meter

Applications:

- Smart Manufacturing Solutions
- Water & Wastewater Infrastructure
- Water & Wastewater Treatment
- Food & Beverage Processing
- Chemical Processing & Refining



Smart Electromagnetic Flow Meter

POOYAB-SM6

Introduction:

This device comprises an integrated metering system and an advanced datalogger that accurately measures and collects consumption data and events.

Daily, the Events and data submitted by each device are exchanged with the “Pooyac Online Monitoring Platform” by the GPRS/SMS platform or on the requested duration. To learn more about the Monitoring Platform please refer to the product page on the website.


Additionally, this device complies with industrial communication requirements. Several communication interfaces are incorporated to enable integrity with industrial controllers, including M-Bus, 2wire Loop Current, Modbus-RTU, pulse output, and Lora.

Working Principle:

The medium passing through the pipe is subjected to a constant alternating magnetic field. According to Faraday's law of electromagnetic induction, the voltage induced in the medium is proportional to its velocity as it moves through the magnetic field. This induced voltage is picked up by two internal electrodes in contact with the medium. The signal is then amplified, and the volumetric flow rate is calculated by considering the pipe's cross-sectional area.

Features:

- Forward and reverse metering
- Internal EM disruption detector
- Empty pipe recognition
- Available in separate and integrated models
- Anti-UV & Anti-impact display box
- 3-Year Extended-life battery
- Internal Clock with backup battery (IEC62054)
- Internal GPS Module (Optional)
- 360° rotatable LCD for consumption and event display
- RFID contactless card reader (ISO14443 & ISO7816)
- M-Bus Port for External Electricity Meter Connection
- Optical Port for Device Reading and Configuration (IEC62056)
- RS485 (Modbus-RTU) for Real-Time Flow and Cumulative Consumption Display
- Internal GPS Module (Optional)

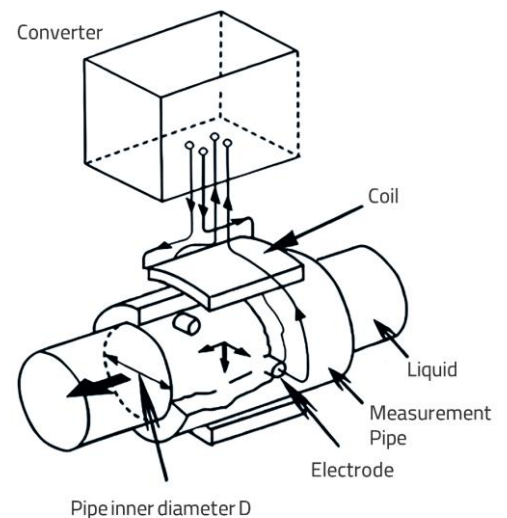


Technical Parameters			
Measuring Principle	Electromagnetic	Minimum Conductivity	5μS/cm
Dynamic Range	R160	Battery Type	Non-Rechargeable, 2x19mAh
Accuracy Class	±0.5%Reading	Battery Life	3 years (Usage) 10 years (Expiration)
Ambient Temp.	-20 ... +60°C		
Process Temp Range	Depending on the Liner Material	AC Power	24vDC / 220vAC / 380vAC
Protection Class	IP68	Max. Static Pressure [bar]	16,25 [Optional]
Process Connection	Flange DIN, ANSI	Output Signal	4-20mA RS485 [Modbus-RTU] LoRa Pulse M-Bus Infrared Reading
Pipe Size [inch]	2,3,4,5,6,8,10,		
Compatible Media	12,14,16,20		
Material		Design Features	
Liner	Polyethylene [PE] PTFE Hard Rubber EPDM Custom	Sleek, compact and suited design to the specific conditions of the installation location. The ability to install in all horizontal, inclined and vertical situations Waterproof with IP68 degree of protection 360° rotatable LCD Structure: integrated and separated	
Body Material	Carbon Steel		
Electrode	Titanium SS316L Hastelloy		
Display Box	Polycarbonate (Anti-UV & Anti-impact)		
Standards & Certificates			
ISO 17025, ISO 4064, IMOL Standards license number 11101/100/98 dated 06/20/98 from the IRI Ministry of Energy. Conformity certificate of 0.2% accuracy (Certificate No. 971415 dated 10/08/98 of SAM laboratory.			
CE 			

Flow Value Table						
Size	Recommended Flow Value		Factory Setting			
	~Q _{min}	~Q _{max}	Current Output 4 ... 20mA	Pulse Output		Cut-off Level
			Measuring Range	Volume/Pulse	Pulse/m3	
[Inch]	[m³/h]	[m³/h]	[m³/h]	[Liter/Pulse]	[#/m3]	[m³/h]
2	0.1	20	0 ... 16	120	8.33	0.06
3	0.25	50	0 ... 40	300	3.33	0.15
4	0.39375	78.75	0 ... 63	472.5	2.12	0.23625
5	0.625	125	0 ... 100	750	1.33	0.375
6	1	200	0 ... 160	1200	0.83	0.6
8	1.5625	312.5	0 ... 250	1875	0.53	0.9375
10	2.5	500	0 ... 400	3000	0.33	1.5
12	3.9375	787.5	0 ... 630	4725	0.21	2.3625
14	6.25	1250	0 ... 1000	7500	0.13	3.75
16	10	2000	0 ... 1600	12000	0.08	6
20	15.625	3125	0 ... 2500	18750	0.05	9.375



Wiring Diagrams:

Item	Tag	Description	Item	Tag	Description
ACFuse	F1	0.5A 250VAC	T2 Interfaces	485A	Modbus
T1 AC Power		Earth		485B	
	N	Null		Pulse	Pulse Output
	L	220v 50Hz		Common	
T3 Encloser Switch	N.O.			MBUS	M-BUS Port (No Polarity)
	Switch			MBUS	
T4 DC Power	-	GND		NC	-
	+	12 ... 28vDC		C-LOOP	2-wire Loop Current (No Polarity)
SW1 Door Switch		Lock Seal Alarm		C-LOOP	
				NC	-
BAT Battery Box		Replaceable Battery Box		GND	-
				WI	

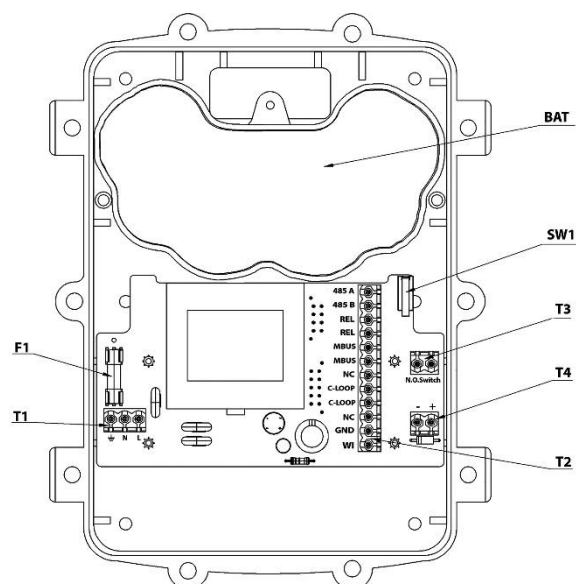

Modbus RTU Transmission Settings:

Data in the RS485 physical layer are transmitted serially. The communication protocol follows the Modbus RTU standard, and the following formats must be used.

Start	1	2	3	4	5	6	7	8	Stop
-------	---	---	---	---	---	---	---	---	------

Bit sequence without parity checking (8N1)

- Baud rate 9600 bps
- 1 Start bit
- 8 data bits (LSB is sent first)
- No bit for parity checking
- 1 stop bit

All Modbus RTU messages are sent in the following format:

Slave Address	Function Code	Data	CRC
1 byte	1 byte	0 up to 252 byte(s)	2 bytes - CRC16 CRC Low & CRC High

Slave Address:

The address "0" is reserved for broadcasting in the query mode of the Master device. The individual Slave devices can be assigned in the range of 1 – 247. In one network, more than one device with the same address is forbidden. The default address is set to "1".

Function Code:

0x03 (3) "Read Holding Register"




Modbus register layout:

Type	Address (decimal)	Description
Float	44112	Flow (m^3/h)
Long	44114	Positive Cumulative flow (m^3) (Integral part)
Float	44116	Positive Cumulative flow (m^3) (decimal part)
Long	44124	Negative Cumulative flow (m^3) (Integral part)
Float	44126	Negative Cumulative flow (m^3) (decimal part)


Dimensions:

A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]
136	160	190	43	145	211.6


Size [Inch]	Nom. Size [DN]	G [mm]	H [mm]	I [mm]	J [mm]	L [mm]	Screws [#]	Weight [Kg]
2	50	18	390	165	192	200	4	12
3	80	18	422	200	192	200	8	14.5
4	100	18	444	220	240	250	8	17
5	125	18	472.5	250	230	250	8	21
6	150	20	505	285	286	300	8	26
8	200	22	567	340	334	346	8	33
10	250	22	620.5	407	384	400	12	54.6
12	300	25	688.5	457	488	400	12	80
14	350	26	747	520	525	550	12	102
16	400	29	800.5	580	580	600	16	130
20	500	33	942	715	560	600	20	200

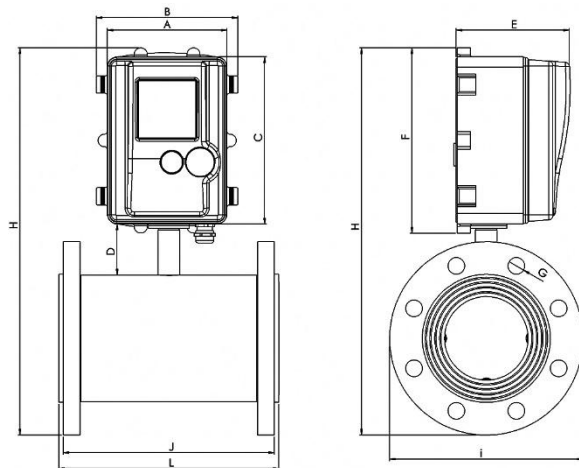

Structure Types:

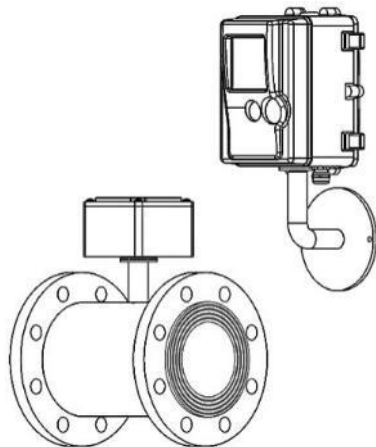


Separated

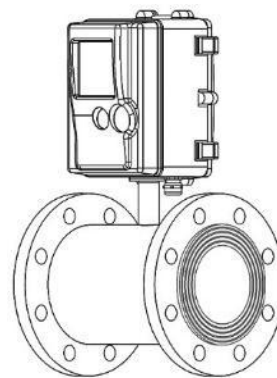

Integrated



Recommendations Regarding Installation:

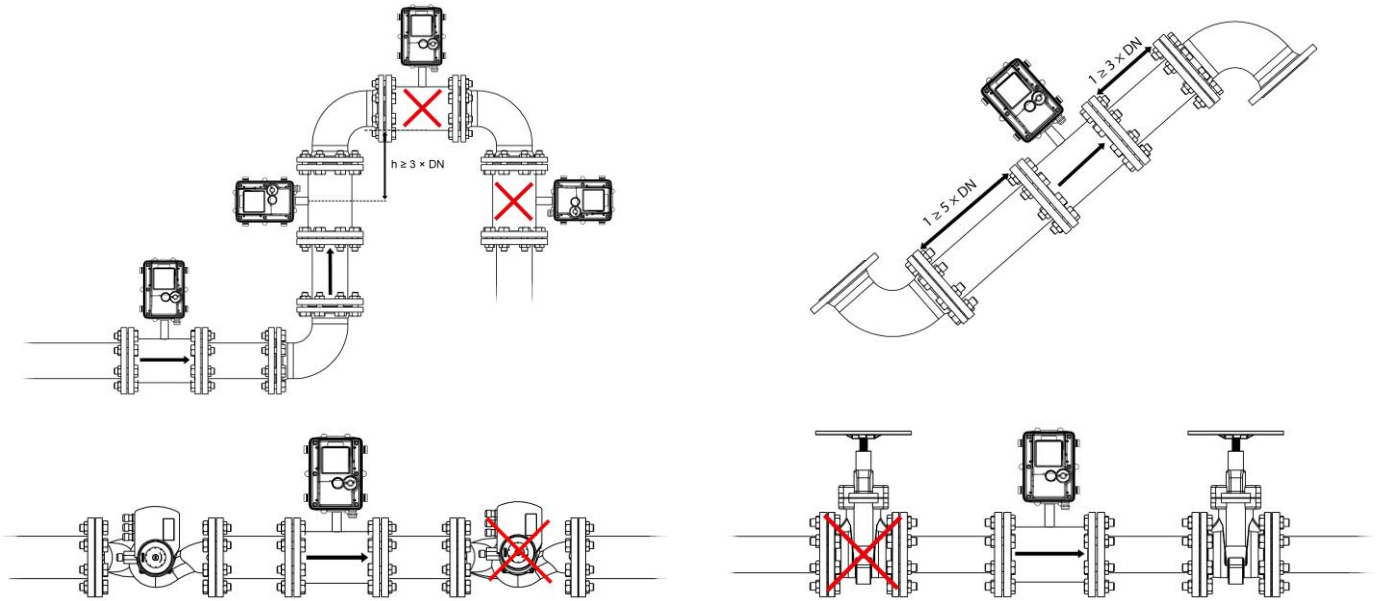

Ordering Procedure:

Model	POOYAB-SM6										
Pipe Size	2"	3"	4"	5"	6"	8"	10"	12"	14"	16"	20"
	DN50	DN80	DN100	DN125	DN150	DN200	DN250	DN300	DN350	DN400	DN500
Liner Material	PE		Hard Rubber			PTFE		EPDM		Custom	
	L1		L2			L3		L4		Lx	
Static Pressure	16Bar						25Bar				
	P16						P25				
Electrode Material	Titanium				316L				Other		
	E1				E2				Ex		
Structure	Integrated						Separated				
	S1						S2				
Power	12...24vDC				220vAC (Single Phase)				380vAC (Two Phase)		
	PW1				PW2				PW3		
Internal Battery	Not included						Non-Rechargeable, 2x19mAh Battery				
	B0						B1				
Output Signal	Modbus			Modbus + 4...20mA			Modbus + Pulse			Modbus + 4...20mA + Pulse	
	O1			O2			O3			O4	
Communications	None			GPRS			LORA			GPRS+LORA	
	C0			C1			C2			C3	

Additional Options	
External Antenna	External GSM/GPRS Antenna Plug /ANT
GPS	Internal Global Positioning System Module /GPS
M-BUS	Enable M-BUS Connection /M-BUS

Example: POOYAB-SM6-DN100-L1-P16-E1-S1-PW1-B1-O1-C1 /ANT

Revision: 014 (07/28/2025)

